



CoBox® Micro Device Server

The Lantronix® CoBox Micro is a board-level product for OEM users who want to embed proven mainstream Ethernet connectivity in their products quickly and economically.

The CoBox Micro brings over a decade of networking experience, rock-solid IP firmware and extensive applications support to industrial and commercial environments.

Measuring only 1.6 in x 1.9 in, the CoBox Micro can easily fit into almost any size serial device that would benefit from network connectivity. Serial interfacing is accomplished via a TTL connector and for Ethernet access, an RJ45 (10BASE-T) is available. The CoBox Micro supports the same IP protocol stack found on the other Lantronix CoBox products.

- Easily network-enable any product
- Flexible, well-developed IP protocol stack
- Ethernet RJ45 (10BASE-T) connector on the board
- TTL serial interface
- Accepts 5V regulated input power
- HTTP, Serial, Telnet and SNMP management
- Flash ROM for easy software upgrade
- Custom protocol support available

Protocols

ARP, UDP, TCP, Telnet, ICMP, SNMP, DHCP, TFTP, and HTTP

Networking Interface

RJ45 (10BASE-T)

Serial Interface

TTL level (Asynchronous)

Data Rates

300bps to 115.2Kbps

Serial Line Formats

Characters: 7 or 8 data bits
 Stop bits: 1 or 2
 Parity: odd, even, none

Modem Controls

DTR, RTS, CTS, DCD

Flow Control

XON/XOFF
 CTS/RTS

Management

HTTP
 SNMP (read only)
 Serial login
 Telnet login

System Software

Flash ROM standard:
 downloadable from a TCP/IP host (TFTP) or over serial port

Diagnostic LEDs

Transmit Data
 Receive Data
 Good Link

Compatibility

Ethernet: Version 2.0/IEEE 802.3

Power Requirements

5VDC +/-5% at roughly 200mA
 Memory
 Flash: 128K
 RAM: 128K
 NVRAM: 512 Bytes

Environmental

Standard Temperature:
 0 to 70°C (32 to 158°F)

Storage Temperature:
 40 to 85°C (-40 to 185°F)

Physical Dimensions

1.574 x 1.929 in
 (40.0mm x 49.0mm)
 Mechanical drawing available
 at www.lantronix.com


Warranty

1-year limited warranty

Ordering Information

Contact Lantronix OEM Sales

Board Layouts and Pinouts

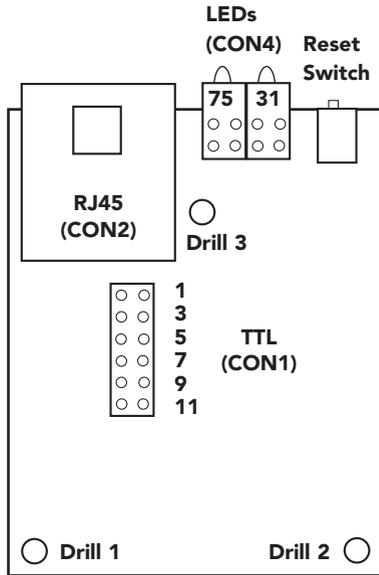

CON1 (2 x 6 Pins)

Pin	Function
1	+5V
2	GND
3	RXA (Input)
4	TXA (Output)
5	RTSA (Output)
6	DTRA (Output)
7	CTSA (Input)
8	DCDA (Input)
9	R/V/A (Output)
10	RESET, to be pulled low
11	Reserved (Input)
12	Reserved (Output)

CON2 (RJ45)

Pin	Con1
1	TX+
2	TX-
3	Rx+
4	NC
5	NC
6	RX-
7	NC
8	NC

CON3 (2 x 2 pins in place of RJ45)

Pin	Function
1	TX+
2	TX-
3	RX+
4	RX-

CON4 (2 x 4 pins in place of LEDs)

Pin	Function
1	+5V
2	+5V
3	LED2
4	LED1
5	+5V
6	+5V
7	LED3
8	LED "good link"

Specifications

CoBox Micro



North American Sales
 15353 Barranca Parkway
 Irvine, CA 92618, USA
 949 453 3990
 949 453 3995 fax
 www.lantronix.com

Direct Sales
 800 422 7055

Reseller Sales
 800 422 7015
 sales@lantronix.com

International Sales
 949 450 7227
 949 450 7231 fax
 intsales@lantronix.com

Asia Pacific
 +65 447 4222
 +65 344 0614 fax

Europe
 +31 76 565 8176
 +31 76 565 8179 fax